



Series flow chart

Surface mount type


125 °C High temperature

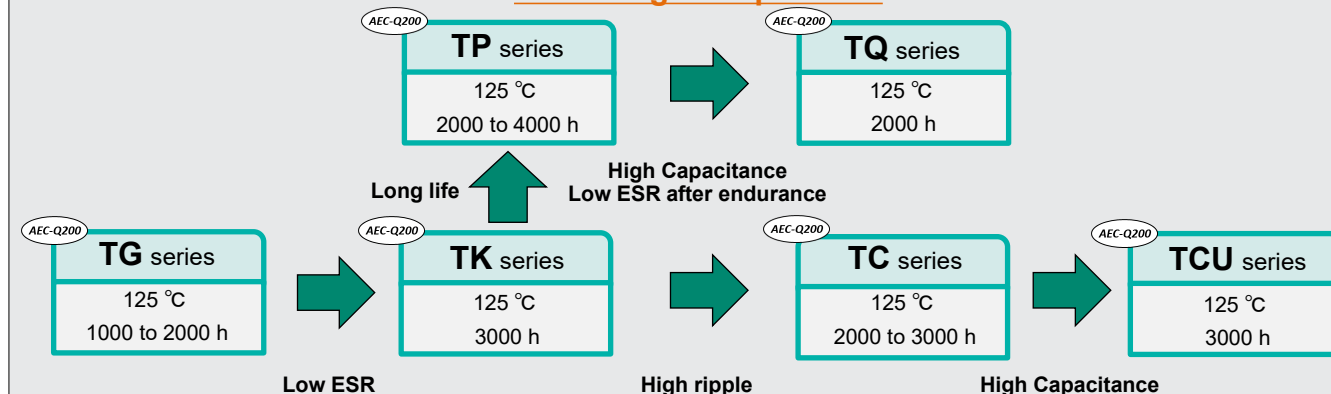

105 °C Low impedance / ESR

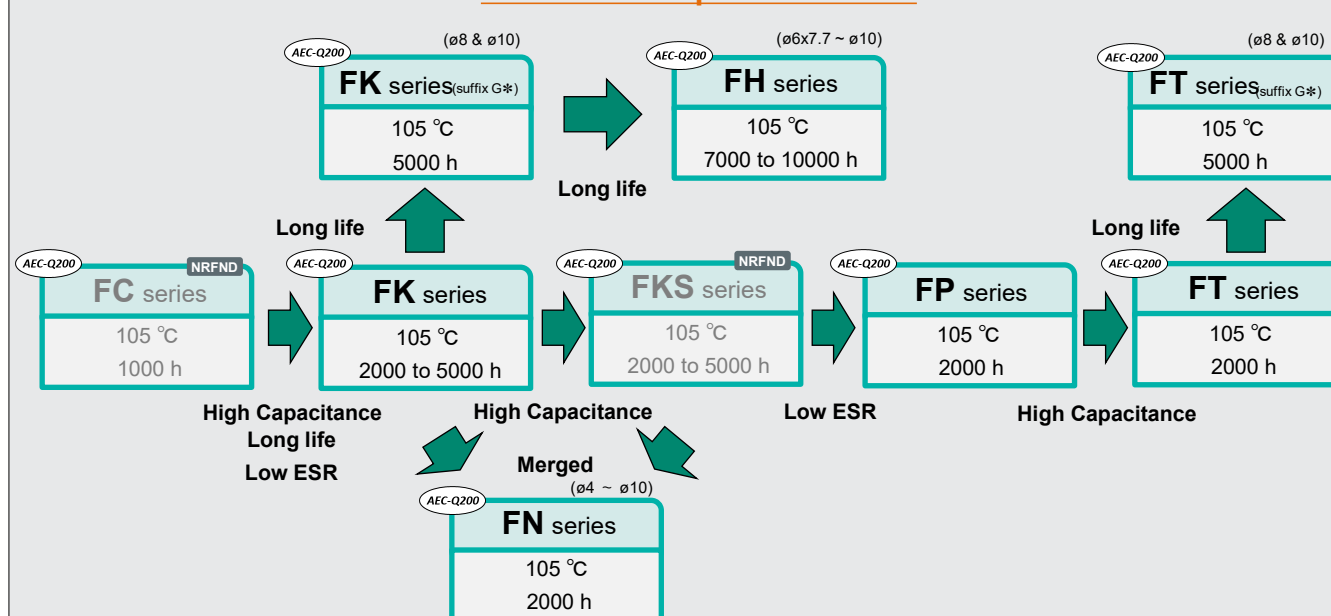

105 °C

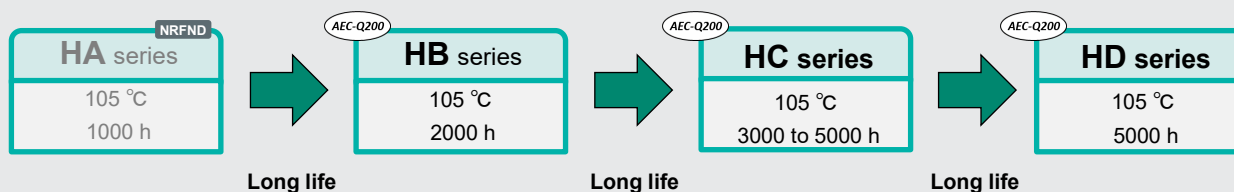

85 °C

